


SIC-W-R2 Series

Outline Drawings

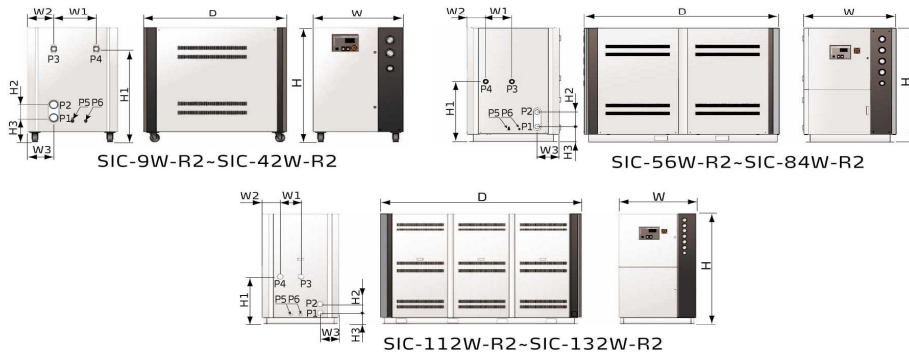

Model	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	W (mm)	W1 (mm)	W2 (mm)	W3 (mm)	D (mm)	P1 (inch) Cooling Water Inlet	P2 (inch) Cooling Water Outlet	P3 (inch) Chilled Water Inlet	P4 (inch) Chilled Water Outlet	P5 (inch) Water Tank Drainage Port	P6 (inch) Water Tank Overflow Port	Weight (kg)
SIC-9W-R2	970	790	91	207	605	273	164	164	1080	1 1/2	1 1/2	1	1	1/2	1/2	210
SIC-14W-R2	970	790	91	207	605	273	164	164	1080	1 1/2	1 1/2	1	1	1/2	1/2	240
SIC-21W-R2	1050	910	140	225	830	370	230	230	1200	1 1/2	1 1/2	1 1/2	1 1/2	1/2	1/2	330
SIC-28W-R2	1050	910	140	225	830	370	230	230	1200	2	2	1 1/2	1 1/2	1/2	1/2	340
SIC-33W-R2	1200	1078	140	308	865	459	202	162	1470	2	2	2	2	1/2	1/2	430
SIC-42W-R2	1200	1078	140	308	865	459	202	162	1470	2	2	2	2	1/2	1/2	495
SIC-56W-R2	1450	765	200	190	1055	300	295	205	2235	2 1/2	2 1/2	2	2	1/2	1/2	750
SIC-66W-R2	1450	765	200	190	1055	300	295	205	2235	2 1/2	2 1/2	2	2	1/2	1/2	760
SIC-84W-R2	1450	765	200	200	1055	300	215	205	2235	2 1/2	2 1/2	2 1/2	2 1/2	1/2	1/2	800
SIC-112W-R2	1760	750	140	190	1100	300	260	267	2870	2 1/2	2 1/2	2 1/2	2 1/2	1	1	1200
SIC-126W-R2	1760	490	140	190	1100	300	230	250	3085	2 1/2	2 1/2	2 1/2	2 1/2	1	1	1450
SIC-132W-R2	1760	520	140	190	1100	205	325	505	3285	2x2 1/2	2x2 1/2	2 1/2	2 1/2	1	1	1750

Model Selection Reference

Mould Clamping Force (T)	Moulding Capacity (kg/hr)	Model (kW)
≤250	≤25	6
≤450	≤45	11
≤650	≤65	14
≤850	≤85	18
≤1300	≤130	27
≤1800	≤180	38

Mould Clamping Force (T)	Moulding Capacity (kg/hr)	Model (kW)
≤2500	≤250	52
≤3000	≤300	62
≤4000	≤400	84
≤5000	≤500	104
≤6000	≤600	126